


**Robuste Einzeldichtung
Wellenschonend
Einfache Montage
Drehrichtungsunabhängig**

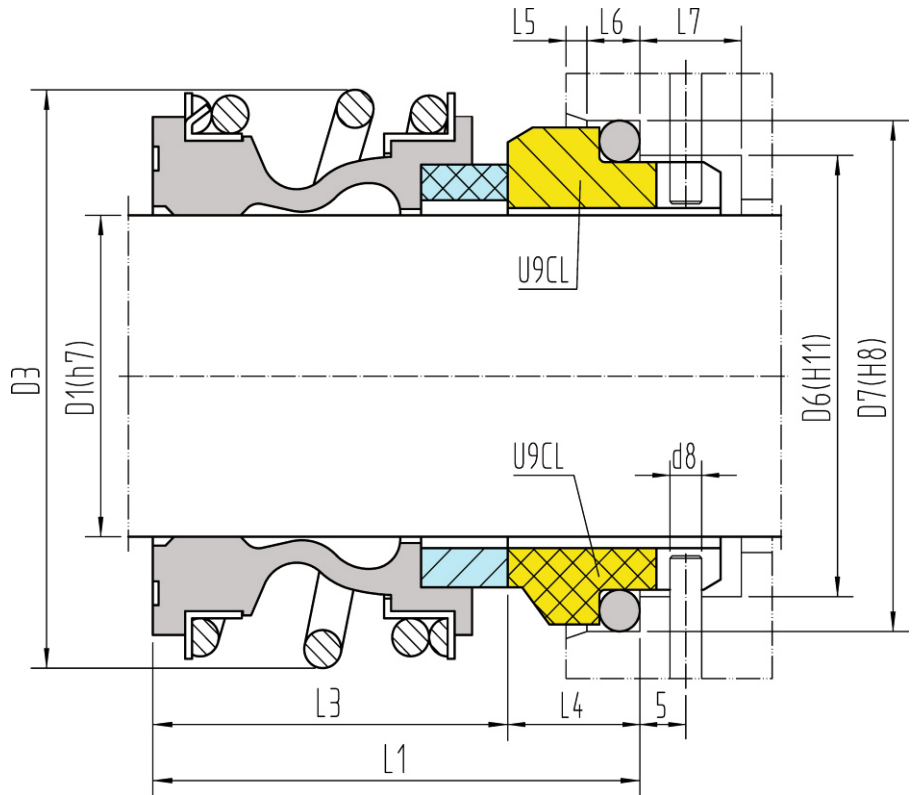

Werkstoffe:

Rotierend: A, B, Q, U
Stationär: A, B, Q, U, V
Nebendichtungen: P, E, V

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 110)

p ≤	12 bar
t =	-20 ÷ 120°C
v ≤	10 m/s

EN 12756 (DIN 24960)

U9CL

D1	D6	D7	D3	L1	L3	L4	L6	L5	L7
10	17	21	22.5	24.5	14.5	10	4	1.5	8.5
12	19	23	25	25	15	10	4	1.5	8.5
14	21	25	28.5	27	17	10	4	1.5	8.5
16	23	27	28.5	27	17	10	4	1.5	8.5
18	27	33	32	31	19.5	11.5	5	2	9
20	29	35	37	33	21.5	11.5	5	2	9
22	31	37	37	33	21.5	11.5	5	2	9
24	33	39	42.5	34	22.5	11.5	5	2	9
25	34	40	42.5	34.5	23	11.5	5	2	9
28	37	43	49	38	26.5	11.5	5	2	9
30	39	45	49	38	26.5	11.5	5	2	9
32	42	48	53.5	39	27.5	11.5	5	2	9
33	42	48	53.5	39	27.5	11.5	5	2	9
35	44	50	57	40	28.5	11.5	5	2	9
38	49	56	59	44	30	14	6	2	9
40	51	58	62	44	30	14	6	2	9
43	54	61	65.5	44	30	14	6	2	9
45	56	63	68	44	30	14	6	2	9
48	59	66	70.5	44.5	30.5	14	6	2	9
50	62	70	74	45.5	30.5	15	6	2.5	9
53	65	73	78.5	48	33	15	6	2.5	9
55	67	75	81	50	35	15	6	2.5	9
58	70	78	85.5	52	37	15	6	2.5	9
60	72	80	88.5	53	38	15	6	2.5	9
63	75	83	92.5	55	40	15	6	2.5	9
65	77	85	93.5	55	40	15	6	2.5	9
68	81	90	96.5	58	40	18	7	2.5	9
70	83	92	99.5	58	40	18	7	2.5	9
75	88	97	107	58	40	18	7	2.5	9
80	95	105	112	58.2	40	18.2	7	3	9
85	100	110	120	59.2	41	18.2	7	3	9
90	105	115	127	63.2	45	18.2	7	3	9
95	110	120	132	63.2	46	17.2	7	3	9
100	115	125	137	64.2	47	17.2	7	3	9