

PA 12 PHL

Tube in bars for loading granules. Excellent abrasion resistance, flexibility and range of diameters covering from the inner \varnothing 44 mm to 110 mm.

FEATURES

The tubes in this series are produced with plasticized flexible **12 PHL polyamide**, stabilized in light and heat and stored in our warehouses in **6 m straight bars**. Equipped with the **flexibility** characteristic of this material, they also enjoy **excellent resistance to abrasion and aging**. We produce a range of diameters covering from the inner \varnothing 44 mm to 110 mm.


SECTORS

INDUSTRIAL

FOOD

APPLICATIONS

LOADING RAW MATERIAL GRANULES

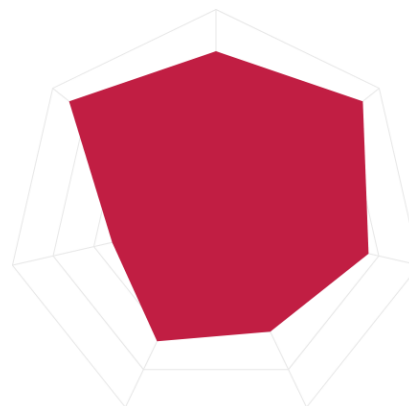

Products

Part number	Diametro int	Diametro est	Spessore	Colori standard	METRI .
12PHL44X51X6	44 mm	51 mm	3.5 mm	(T)	6 m
12PHL50X60X6	50 mm	60 mm	5 mm	(T)	6 m
12PHL53X61X6	53 mm	61 mm	4 mm	(T)	6 m
12PHL55X63X6	55 mm	63 mm	4 mm	(T)	6 m
12PHL60X70X6	60 mm	70 mm	5 mm	(T)	6 m
12PHL62X70X6	62 mm	70 mm	4 mm	(T)	6 m
12PHL70X80X6	70 mm	80 mm	5 mm	(T)	6 m
12PHL72X80X6	72 mm	80 mm	4 mm	(T)	6 m
12PHL80X90X6	80 mm	90 mm	5 mm	(T)	6 m
12PHL90X100X6	90 mm	100 mm	5 mm	(T)	6 m

PRESSURE/TEMPERATURE

Operating temperature: from -40°C to 80°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

