


**Kein dynamischer O-Ring
Wellenschonend
Selbstreinigend
Drehrichtungsunabhängig**

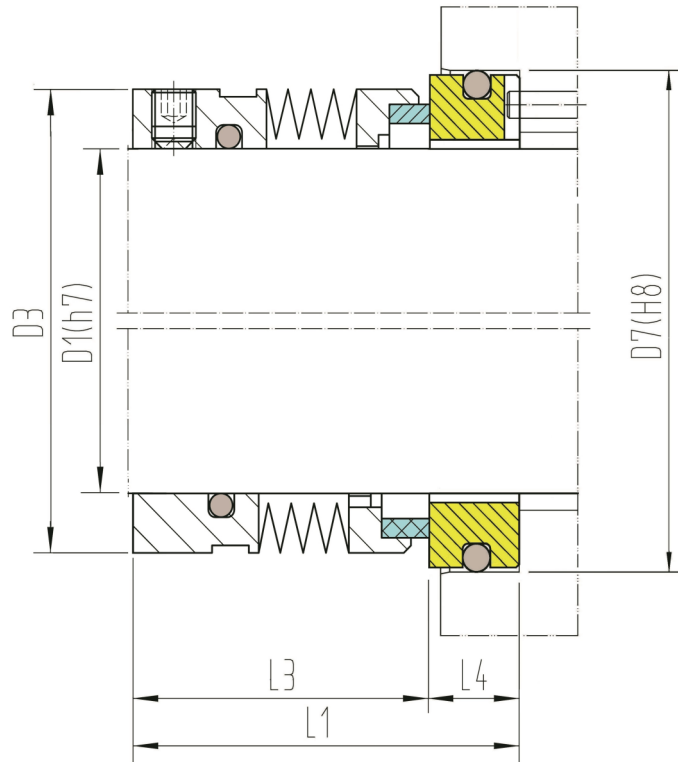

Werkstoffe:

Rotierend: A, B, Q, U
Stationär: Q, U
Metallbalg: G, M3, M5, M6
Nebendichtungen: P, E, V, K, M

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 112)

p ≤	25 bar
t =	-35 ÷ 220°C
v ≤	20 m/s

EN 12756 (DIN 24960)			CWCN		
D1	D7	D3	L1	L3	L4
18	34.15	32	38	27.5	10.5
20	35.7	34	38	27.5	10.5
22	37.3	36	38	27.5	10.5
24	40.5	39	40.5	30	10.5
-	-	-	-	-	-
25	40.5	39	40.5	30	10.5
28	47.65	42	43	32.5	10.5
30	50.8	44	44.5	32.5	12
32	50.8	46	44.5	32.5	12
33	54	47	44.5	32.5	12
35	54	50	44.5	32.5	12
38	57.15	53	46	34	12
40	60.35	56	46	34	12
43	63.5	59	46	34	12
45	63.5	59	46	34	12
48	66.7	62	46	34	12
50	69.85	66	48	34.5	13.5
53	73.05	69	48	34.5	13.5
55	76.2	71	48	34.5	13.5
60	79.4	75	53	39.5	13.5
-	-	-	-	-	-
65	92.1	85	55.5	39.5	16
70	95.25	88	61	45	16
-	-	-	-	-	-
75	101.6	96	61	45	16
-	-	-	-	-	-
80	114.3	99	65.5	44.5	20
85	117.5	105	65.5	44.5	20
-	-	-	-	-	-
90	123.85	108	69.5	49.5	20
95	127	115	69.5	49.5	20
-	-	-	-	-	-
100	133.35	121	69.5	49.5	20

ZOLL		
D1	D3	L3
0.750	1.312	1.250
-	-	-
0.875	1.437	1.250
-	-	-
0.937	1.500	1.250
1.000	1.562	1.250
1.125	1.687	1.250
-	-	-
1.250	1.812	1.312
-	-	-
1.375	1.937	1.437
1.500	2.062	1.437
1.625	2.187	1.437
1.750	2.312	1.437
-	-	-
1.875	2.437	1.500
2.000	2.562	1.500
2.125	2.687	1.500
2.250	2.812	1.562
2.375	2.937	1.562
2.500	3.187	1.562
2.625	3.312	1.625
2.750	3.437	1.625
2.875	3.625	1.687
3.000	3.750	1.687
3.125	3.875	1.750
3.250	4.000	1.750
3.375	4.125	1.750
3.500	4.250	1.875
3.625	4.375	1.875
3.750	4.500	1.875
3.875	4.625	1.875
4.000	4.750	1.875