


## Einfache Großseriendichtung Kegelfeder rotierend Massive Gleitringe

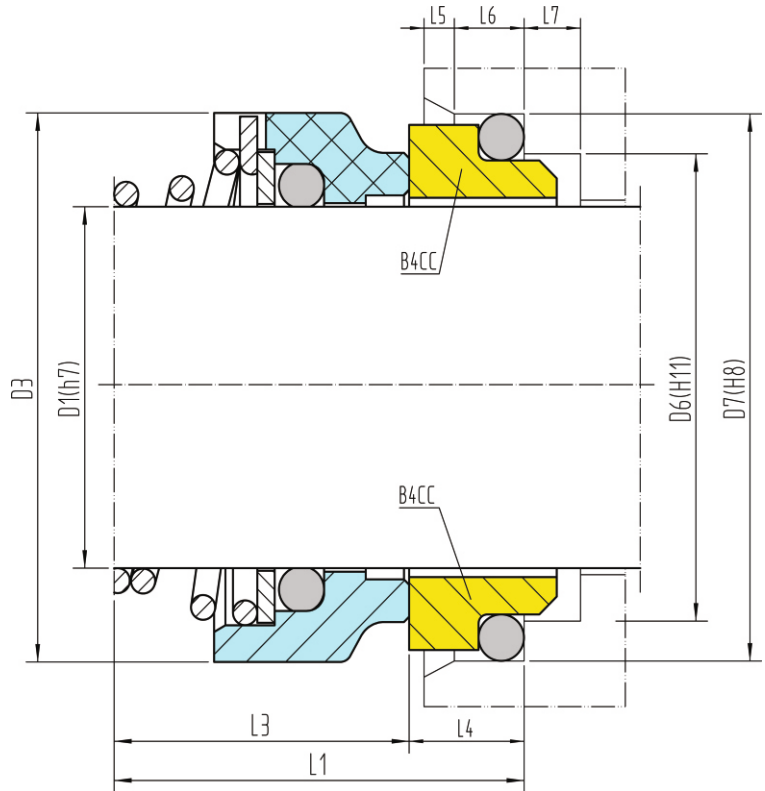

### Werkstoffe:

Rotierend: A, B, Q, U, G, E

Stationär: Q, U, V

Nebendichtungen: P, E, V, K, M

### Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 110)

p ≤	12 bar
t =	-20 ÷ 140°C (180°C)
v ≤	15 m/s

Spezielle Einbauräume							B4CC		
D1	D6	D7	D3	L1	L3	L4	L6	L5	L7
10	15.5	19.2	21	22.5	15.9	6.6	3.8	1.5	8.5
12	17.5	21.6	22	21.6	16	5.6	3.8	1.5	8.5
14	20.5	24.6	25	21.6	16	5.6	3.8	1.5	8.5
15	20.5	24.6	27	24	17.4	6.6	3.8	1.5	8.5
16	22	28	27	26.5	19	7.5	5	1.5	8.5
18	24	30	30	28.5	20.5	8	5	2	9
19	29.5	35	32	29.5	22	7.5	5	2	9
20	29.5	35	32	29.5	22	7.5	5	2	9
22	29.5	35	35	31	23.5	7.5	5	2	9
24	32	38	38	32.5	25	7.5	5	2	9
25	32	38	40	34	26.5	7.5	5	2	9
26	34	40	41	34.5	26.5	8	5	2	9
28	36	42	43	35.5	26.5	9	5	2	9
30	39.2	45	47	35.5	25	10.5	5	2	9
32	42.5	48	48	39	28.5	10.5	5	2	9
35	46.2	52	53	39.5	28.5	11	6.5	2	9
38	49.2	55	56	42.3	32	10.3	6.5	2	9
40	52.2	58	56	44.8	34	10.8	6.5	2	9