


Außenliegende Universal-Dichtung
Druckumkehr geeignet
Massive

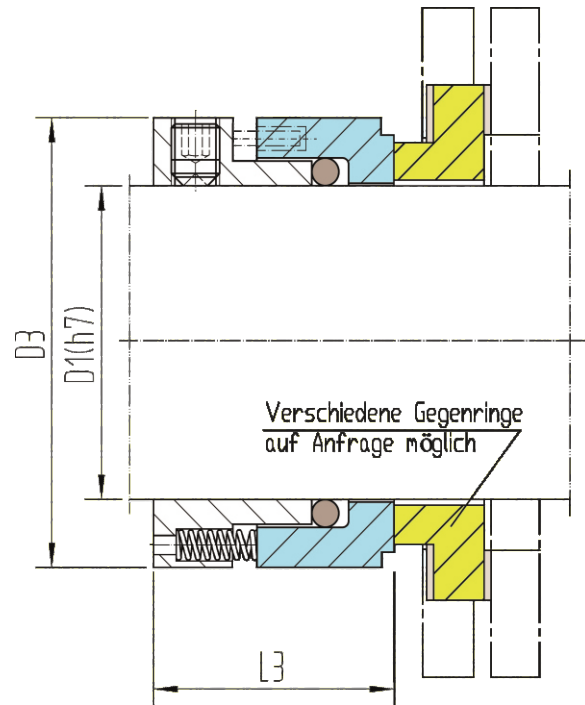

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 110)

7K1	
$p \leq$	12 bar
$t =$	$-35 \div 140^\circ\text{C}$ (180°C)
$v \leq$	15 m/s
	Axialbewegung $\pm 0,2\text{mm}$

Werkstoffe:

Rotierend: E, F, G, Q, U

Stationär: Auf Anfrage

Nebendichtungen: P, E, V, K, M

D1	D3	L3
20	40	22
22	42	22
24	44	22
25	47	24
28	50	24
30	52	24
32	54	24
33	55	24
35	57	24
38	65	29
40	67	29
42	69	29
43	70	29
45	72	29
48	75	29
50	77	29
53	80	29
55	82	29
58	85	29
60	87	29
63	90	29
65	92	29
68	95	29
70	97	29
75	102	29
80	112.5	31
85	117.5	31
90	122.5	31
95	127.5	31
100	132.5	31
105	137.5	31
110	142.5	31
115	156	55
120	161	55
125	166	55
130	171	55
140	181	55
150	191	55