


Universelle Chemie-Dichtung Kegelfeder rotierend Massive, gelötete oder eingeschrumpfte Gleitringe

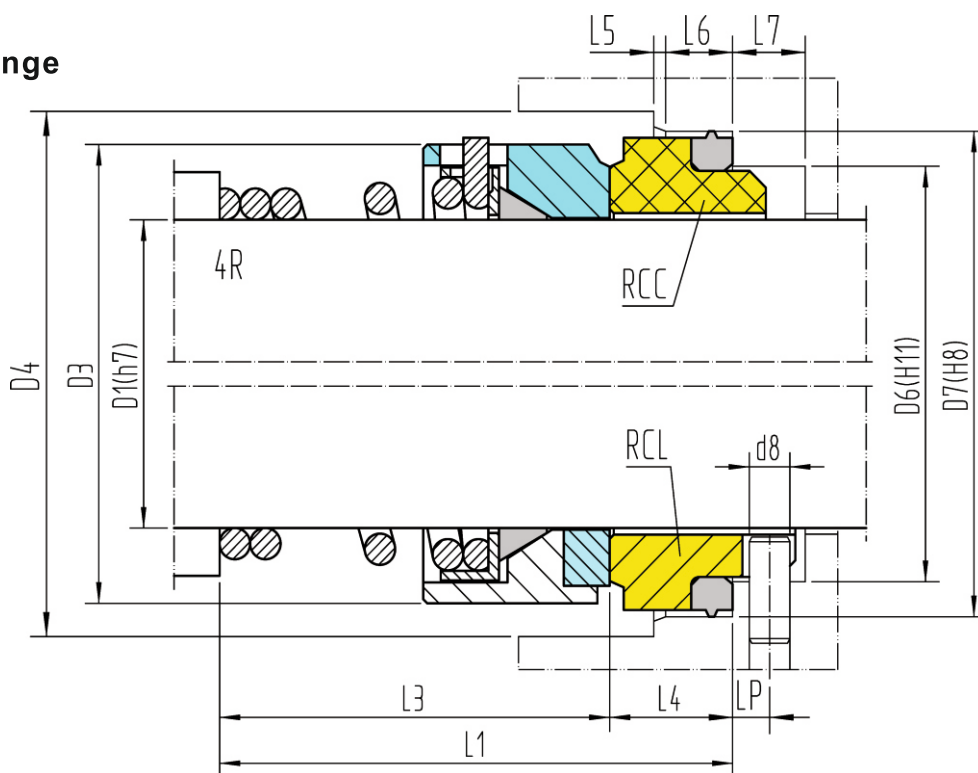

Einsatzgrenzen:
(siehe Betriebsbedingungen Seite 112)

4R	
p ≤	12 bar (16bar)
t =	-35 ÷ 140°C (180°C)
v ≤	15 m/s

Werkstoffe:

Rotierend: B, G, Q, U, M

Stationär: B, Q, U

Nebendichtungen: T

Spezielle Einbauräume													RCC	RCL
D1	D6	D7	D3	D4	L1	L3	L4	L6	L5	D8	L7	Lp		
6	10.6	13.1	14	20	19.5	15	4.5	2	1.2	2	6	3.5		
7÷9	13	17.1	17	23	20.5	15	5.5	2.8	1.2	2	6.2	3.5		
10	14	18.1	18.4	24	20.5	15	5.5	2.8	1.2	2	6.2	3.5		
11÷12	16.5	20.6	21	27	23.5	18	5.5	2.8	1.2	2	6.2	3.5		
13÷14	19	23.1	24	30	28	22	6	2.8	1.2	2	6.7	4		
15	21	26.9	25.4	31	29	22	7	3.7	1.3	2.5	7.6	4		
16÷17	21	26.9	26	34	30	23	7	3.7	1.3	2.5	7.6	4		
18	25	30.9	29	37	32	24	8	3.7	1.3	3	8.5	4.5		
19÷20	25	30.9	30	39	33	25	8	3.7	1.3	3	8.5	4.5		
21÷22	30	35.4	34	42	33	25	8	3.7	1.8	3.5	8.5	5		
23÷24	30	35.4	35	44	35	27	8	3.7	1.8	3.5	8.5	5		
25÷27	33	38.2	37	48	35.5	27	8.5	3.7	1.8	4	9.1	5		
28	38	43.3	42	50	38	29	9	3.7	1.8	4	9.6	6		
29÷32	38	43.3	45	53	39	30	9	3.7	1.8	4	9.6	6		
33÷34	45	53.5	48	64	50.5	39	11.5	5.4	2.1	5	12	7.5		
35÷37	45	53.5	50	64	50.5	39	11.5	5.4	2.1	5	12	7.5		
38÷43	52	60.5	54	69	50.5	39	11.5	5.4	2.1	5	12	7.5		
44÷45	57	65.5	60	76	52.5	41	11.5	5.4	2.1	5	13	8.5		
46÷49	57	65.5	67	80	52.5	41	11.5	5.4	2.1	5	13	8.5		
50	64	72.5	69	82	56.5	45	11.5	5.4	2.1	5	13	8.5		
55	64	72.5	74	87	58.5	47	11.5	5.4	2.1	5	13	8.5		
60	72	79.3	80	93	60.5	49	11.5	5.4	2.1	5	13.5	8.5		
65	77	84.5	87	102	62.5	51	11.5	5.4	2.1	5	13.5	8.5		
70	82	89.5	92	107	62.5	51	11.5	5.4	2.1	5	13.5	8.5		
75	87	94.5	97	113	68.5	57	11.5	5.4	2.1	5	13.5	8.5		
80	92	99.5	102	117	70.5	59	11.5	5.4	2.1	5	13.5	8.5		
85	98	105.5	110	126	72.5	59	13.5	5.4	2.6	5	13.5	8.5		
90	105	111.5	117	131	75.5	62	13.5	5.4	2.6	5	13.5	8.5		
95	110	116.5	122	138	75.5	62	13.5	5.4	2.6	5	13.5	8.5		
100	114	119.5	127	144	88.5	75	13.5	5.4	2.6	5	13.5	8.5		
110	124	132.2	143	168	92.5	75	17.5	7.1	3.9	5	13.5	8.5		
120	134	142.2	155	178	102.5	85	17.5	7.1	3.9	5	13.5	8.5		
130	145	153.2	166	190	112.5	95	17.5	7.1	3.9	5	13.5	8.5		
135	152	161.2	179	201	113.5	95	18.5	7.1	3.9	5	13.5	8.5		
140	157	164.3	186	206	118.5	100	18.5	7.1	3.9	5	13.5	8.5		
150	167	174.2	199	219	128.5	110	18.5	7.1	3.9	5	13.5	8.5		
160	188	195	215	239	141	120	21	9.1	3.9	5	15.5	8.5		

Belastet
Drehrichtungsabhängig

PTFE-Keilring
Gleitringdichtungen